


282A – Transmitting Tetrode

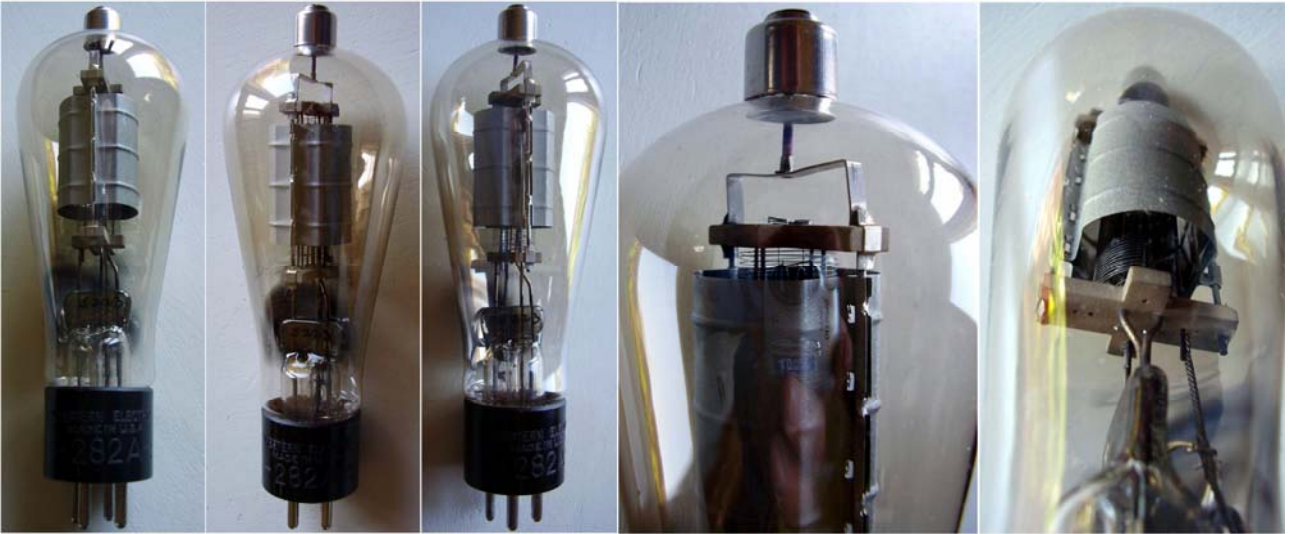

Screen-grid power tube intended for use as radio-frequency driver/amplifier or frequency multiplier. Thoriated-tungsten filament.

- 10 V at 3 A filament
- 100 mA max plate current at 1000 volts max plate voltage.
- 70 W plate dissipation.

Data for [282A](#).

