


5889 –Electrometer Pentode

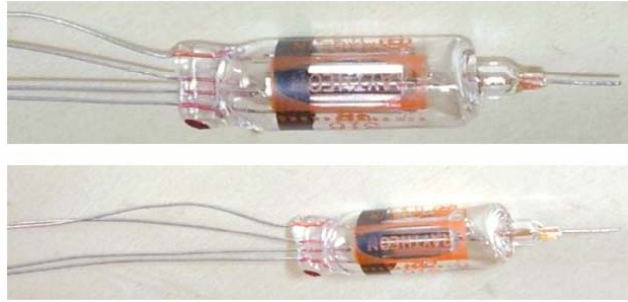

Subminiature electrometer pentode, having the control grid on the top of the T3 bulb. 5 pin, flying leads, flat press (pin 4 suppressed).

45 V max anode voltage, 12 V at 4 μ A typical, gain 250.

1.25V at 7.5mA filament.

First release: March 3, 1950, assigned to Raytheon. RMA record [0834](#).