


5JP1 - CRT

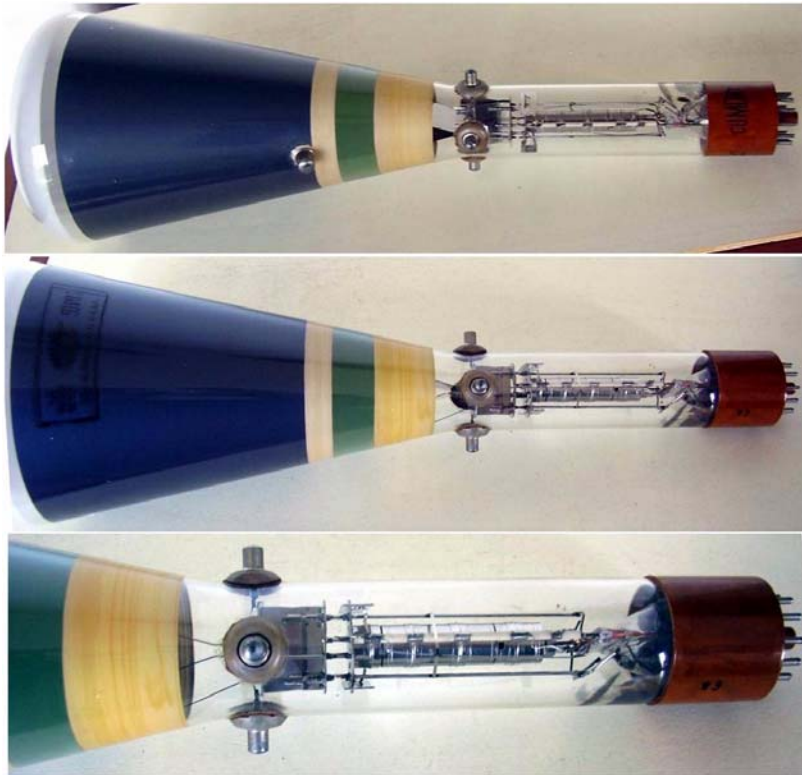

Circular screen 5" CRT. Electrostatic focus and deflection, undecal base.

2000 V anode and 4000 V post-accelerator voltage. Also available with P2, P4, P7 and P11 phosphor.

6.3 volts at 0.6 ampere heater.

First registered by RMA in May 1942, but no data attached. Summary of electrical characteristics given in Volume 22, Cathode Ray Tube Displays, of the M.I.T. Radiation Lab. Series. Data of 5JP1A available in the RMA record [671](#).

