


7355 – Pentode Power Amplifier

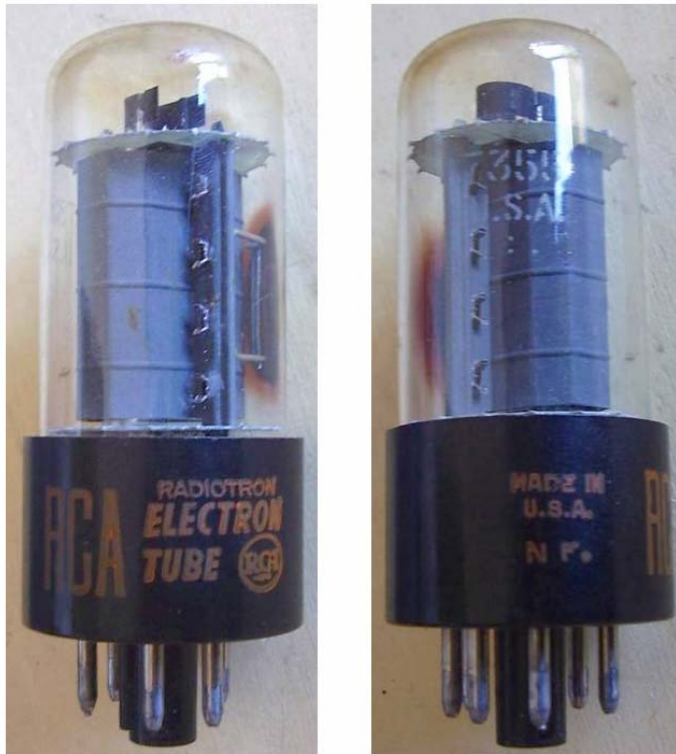

Power pentode intended for use in the output stage of high-fidelity audio amplifiers. 18W max plate dissipation. Two tubes in class AB push-pull can deliver up to 40W.

6.3V at 0.8A heater.

Registered to General Electric in November 1959. Data in the RMA record [2633](#).