


826 – VHF Transmitting Triode

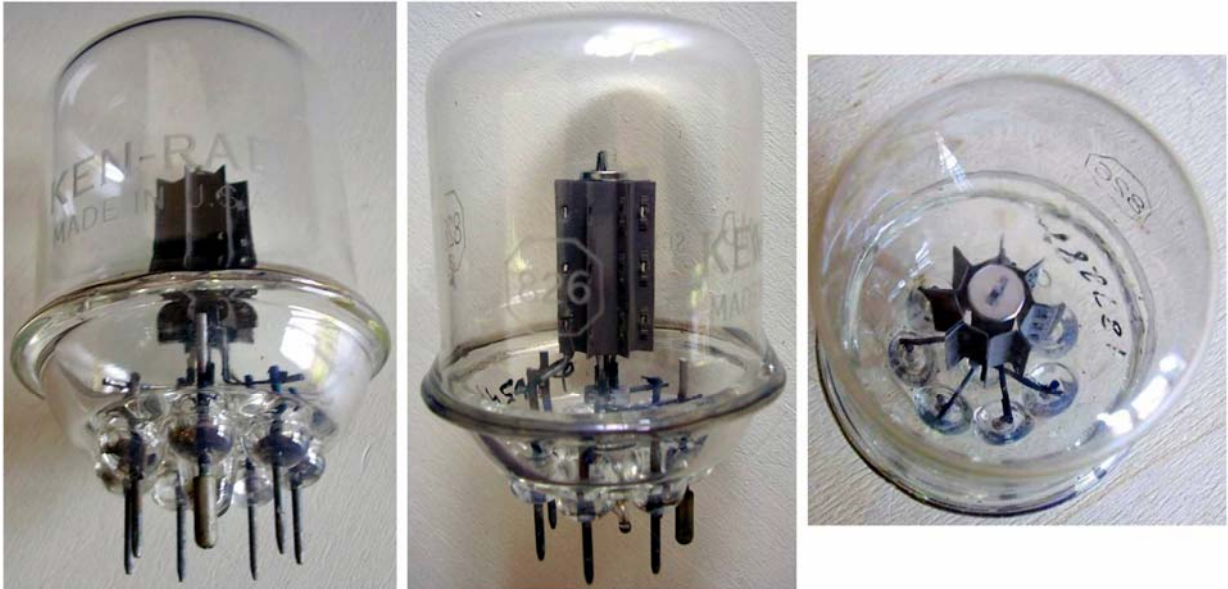

- Click on image to enlarge

Thoriated-tungsten VHF transmitting triode capable of operating up to 250MHz at full input and up to 300MHz at reduced input. All-glass body with septar base, vertical mount. 60W plate power dissipation with forced-air cooling. Double leads for plate and grid. Plate shows orange-red color when tube is operated at maximum continuous service ratings.

7.5 V at 4 A filament.

Two used in the transmitter BC-1072-A of the RC-148 ground IFF equipment, installed on the Radar SCR-268. 157 to 187 MHz.

RCA, registered in bulk in 1943 in the RMA record [347-part1](#) and [347-part2](#)