


## 852 - VHF Transmitting Triode

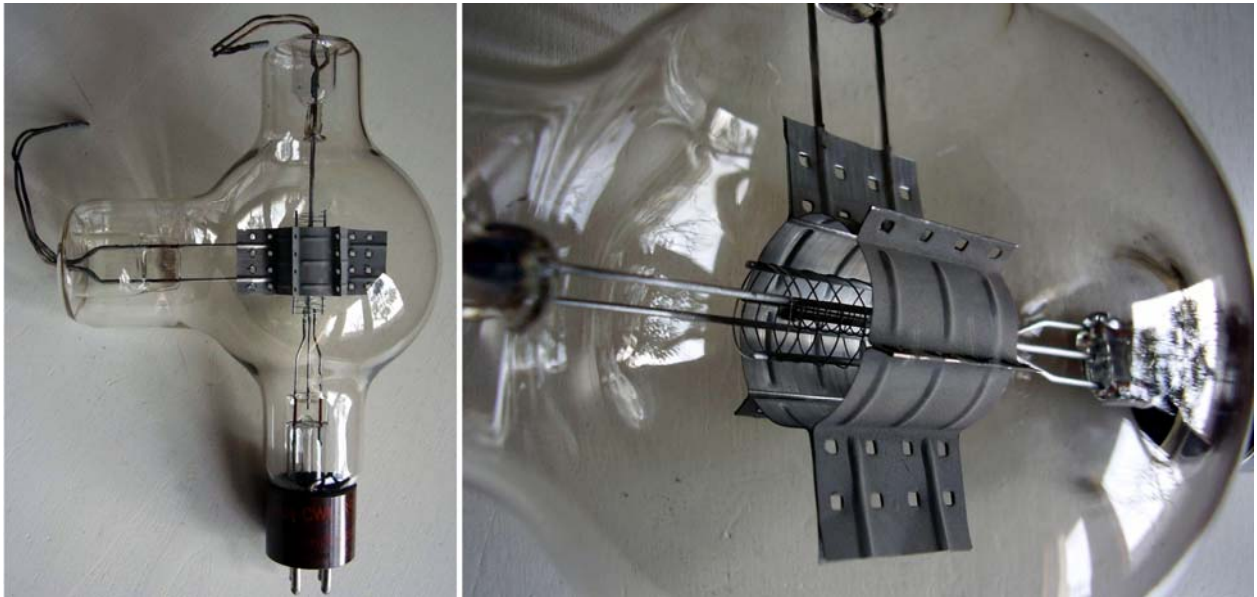

852 was introduced in March 1927 as power triode to operate at high frequencies. The tube was specified for operation up to 30 MHz full ratings and up to 300 MHz at reduced plate voltage.

3000 volts max plate voltage, 100 W plate power dissipation at barely visible red.

Thoriated-tungsten filament. 10 volts at 3.25 amps.