


860 – VHF Transmitting Tetrode

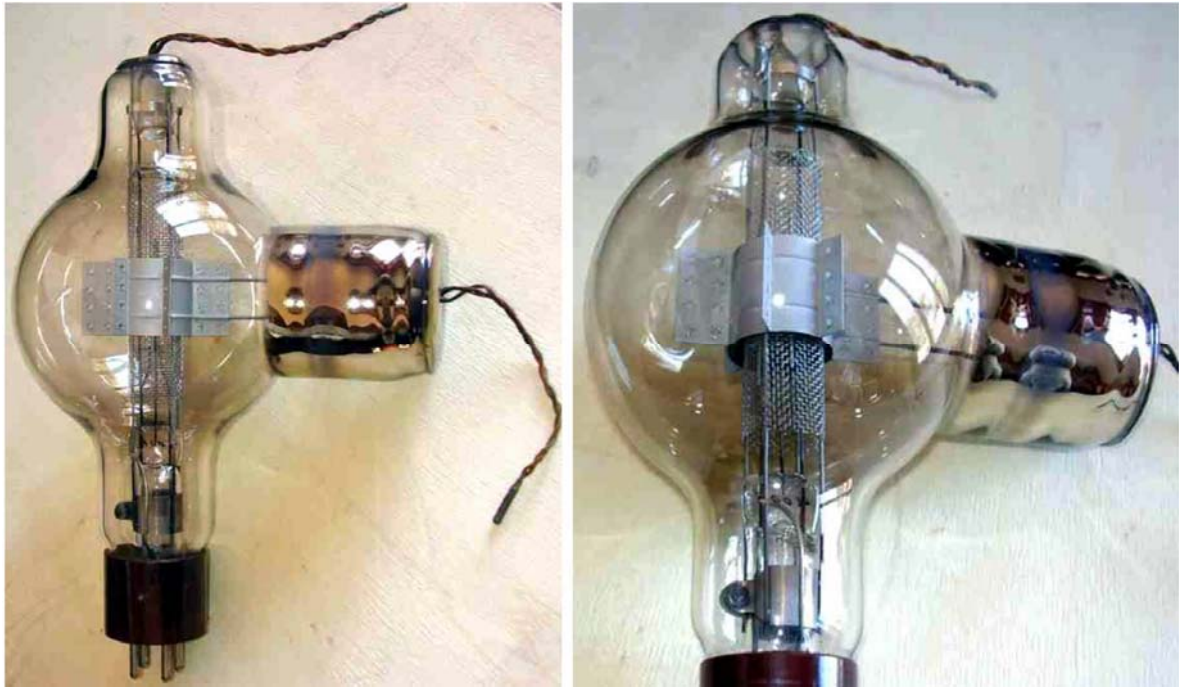

Transmitting power tetrode. Usable at full power up to 30MHz, up to 60MHz with power reduced to 75% and up to 120MHz at half power. 100W CGS plate power dissipation, 300W plate input power typical.

10V at 3.25A filament.

RMA registered to General Electric in April 1943. Data can be found in the RMA registration record [335](#).