


BL-397A – TR Switch

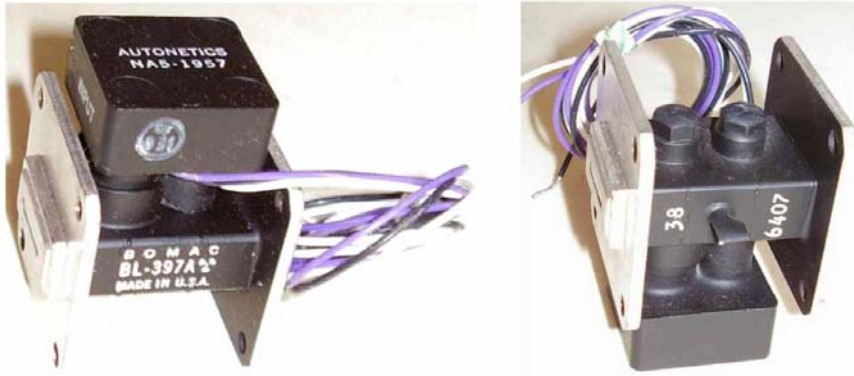

X band combined T/R and shutter tube, 9250 to 9500MHz, 250 kW, waveguide flanged. 600V at 200uA ignitor, internal limiting resistor.

28VDC, 160mA max shutter coil.

Connections: white, ignitor; black and purple, shutter coil.