


DLS10 – Thermal Delay Relay

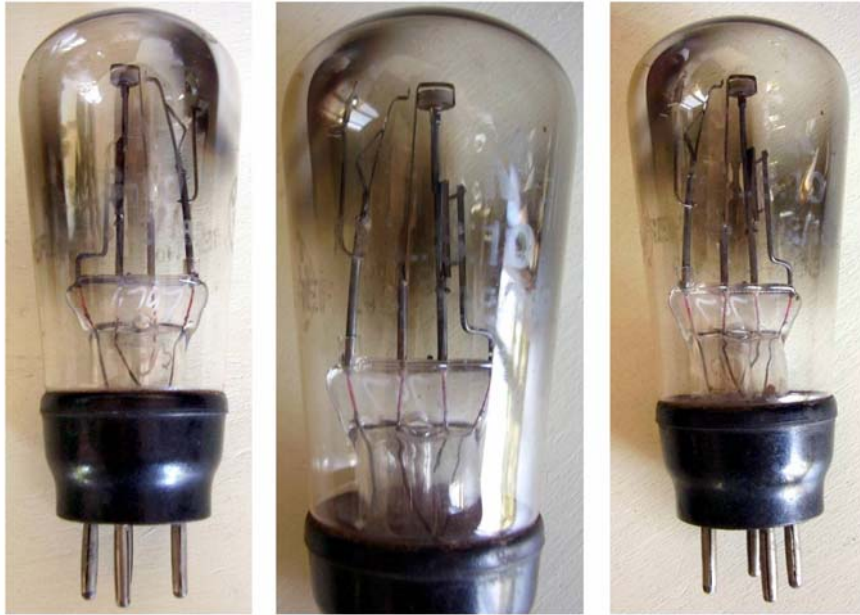

SPST thermal delay relay, balloon shape. Usually available with 4-pin B.V.A. base but UX base was supplied on special order. British AEI and Ediswan known sources.

4 V at 1.5 A heater

6 A at 250 V or 200 mA at 1000 V contact ratings

30 to 90 sec delay time at 4.0 volts heater.

Pinout: 3 - 4 heater, 1 - 2 contact.

Data available [here](#). Standardized as [CV190](#).

