


REL-1 – Transmitting Micropup Triode

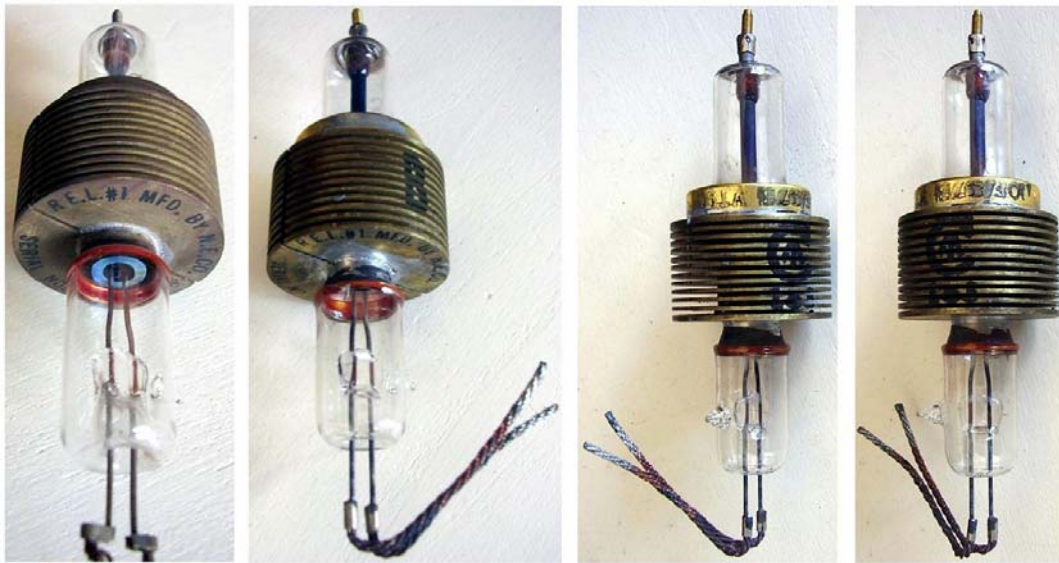

- Click on the image above to enlarge.

9 kV peak anode voltage, 100 W anode dissipation with forced-air cooling. Useful in pulsed operation to above 300MHz.

8.25V at 7A filament.

Canadian equivalent to [VT90](#), [710A](#) and [8011](#).

The samples in the photos were made for REL by Northern Electric, a Canadian company related to Western Electric. The second one is also marked as C.V.90 and as 10E/97B.

