


## WL-531 – HV Power Rectifier

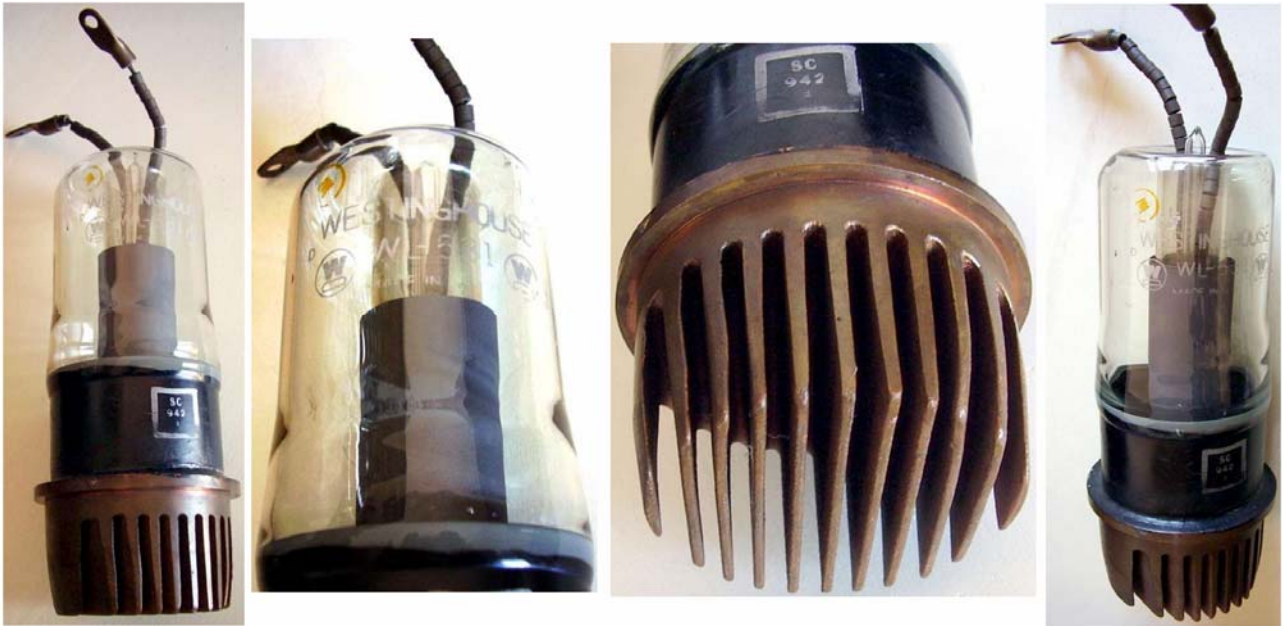

External anode forced-air cooled transmitting rectifier. To be operated with plate radiator down.

11.5 volts at 20 amps filament.

50 kV peak inverse voltage, 290 mA average, 750 mA peak plate current.

Westinghouse.