HP 606A Signal Generator

One of the best analog signal generator ever done. All tube design introduced in 1959.

The 606A was specified for 3 V output signal across 50 ohms within ± 1 dB, through its entire frequency coverage, from 50 kHz to 65 MHz in six bands. 1% accuracy of frequency readings, frequency stability better than 50 ppm drift over 10 minutes. Internal 100 and 1000 kHz crystal calibrator.

400 and 1000 Hz internal AM modulation. External from DC to 20 kHz.
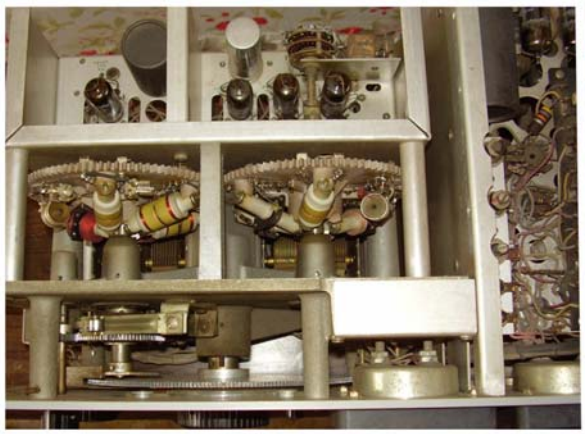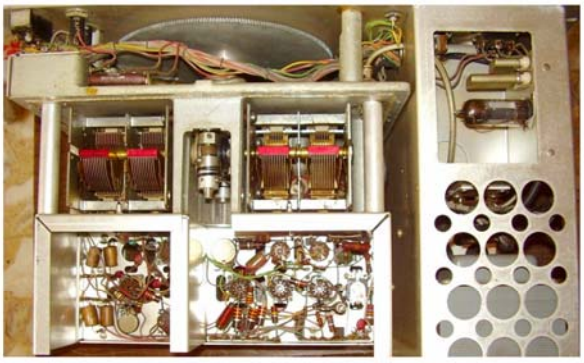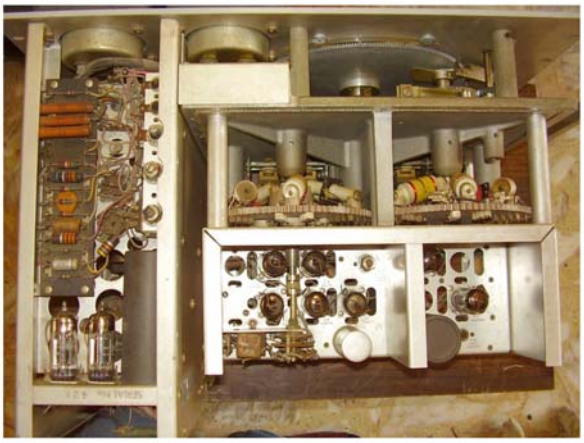
606A manual here.